

Exploiting the randomness of the measurement basis in quantum cryptography: Secure Quantum Key Growing without Privacy Amplification

Hannes R. Böhm,^{1,*} Paul S. Böhm,¹ Markus Aspelmeyer,¹ Časlav Brukner,¹ and Anton Zeilinger^{1,2}

¹*Institut für Experimentalphysik, Universität Wien, Boltzmannngasse 5, 1090 Wien, Austria*

²*Institute for Quantum Optics and Quantum Information,
Austrian Academy of Sciences, Boltzmannngasse 3, 1090 Wien, Austria*

(Dated: 1st February 2008)

We suggest that the randomness of the choices of measurement basis by Alice and Bob provides an additional important resource for quantum cryptography. As a specific application, we present a novel protocol for quantum key distribution (QKD) which enhances the BB84 scheme by encrypting the information sent over the classical channel during key sifting. We show that, in the limit of long keys, this process prevents an eavesdropper from reproducing the sifting process carried out by the legitimate users. The inability of the eavesdropper to sift the information gathered by tapping the quantum channel reduces the amount of information that an eavesdropper can gain on the sifted key. We further show that the protocol proposed is self sustaining, and thus allows the growing of a secret key.

INTRODUCTION

Quantum cryptography [1] was first described by Bennett and Brassard [2] in 1984. Their protocol, commonly called BB84, is still the most widely used protocol for quantum cryptography today. Its simplicity, its proven security [3] and its possibility to be extended to entangled photons [4, 5, 6, 7, 8] has contributed to its widespread use.

BB84 describes a protocol for growing a large secret key between two communicating parties starting from a smaller shared secret. The processing of the raw data found in BB84 requires several steps including key sifting, error correction and privacy amplification. In BB84 privacy amplification [9] allows to generate a secure key starting from a key that might be partially known by a possible eavesdropper. This increase in security comes at the expense of the final key length.

The basic idea of the present paper is to exploit a resource which, though present in all existing protocols, has so far not been utilized to the full extent. The randomness of the basis choices of both legitimate parties is an important resource as it is a sequence of perfect random numbers. In current quantum cryptography protocols it is simply used to choose the basis for both, preparation and measurement of quantum states. We suggest that this sequence can be further exploited. For example it might be used for the encryption of data transmitted between the legitimate parties.

As an explicit example of the idea, we present here a modification to the BB84 protocol that reduces the information the eavesdropper can obtain on the sifted key. It seems that this reduction scales with the length of the raw key, which would imply that the information of an eavesdropper on the sifted key can be made arbitrarily small. Even though a complete security proof is not given, we suspect that our protocol can work at higher quantum bit error rate (QBER) compared to privacy amplification at

the same security level. This advantage is gained by further exploiting the randomness of the measurement basis choices, more than has been done in BB84.

THE PROTOCOL

Our protocol can be seen as an extension of the BB84 protocol in the sense that the production of the raw key is identical to the production in the original BB84. This makes it applicable to both, QKD based on single photons, as well as entangled state QKD [4]. In the analysis of our protocol, we start with from the original BB84 scheme. However, our protocol can easily be extended to the case of entangled qubit quantum cryptography, and probably many other quantum cryptography systems.

The two legitimate communicating parties, called Alice and Bob, establish a common secret key in the following way. Alice prepares a state in a two dimensional Hilbert space using one of two mutually conjugate basis sets and sends it to Bob. In each basis, one basis vector is attributed to the classical bit value “0”, the other to the bit value “1”. The choice of the basis used, and the bit value sent, are both assumed to be completely random.

Upon reception of the state, Bob randomly measures the state in one of the two bases and stores the result together with his choice of basis used. Now both parties possess a table consisting of entries for each state transmitted. This table is called the raw key. Up to this point, our protocol is identical to the BB84 protocol described in [2].

Once the raw key is produced it is sifted, which was done in BB84 by publicly announcing the measurement basis on a classical channel and keeping only the measurement results where Alice and Bob happened to have chosen the same basis (see Figure 1a). We have strong indications, that this public announcement of the measurement bases reveals more information about the sifted

key to an eavesdropper than is necessary for establishing a secure key between the two legitimate parties. To overcome this potential weakness of the existing protocols, a modification of the basis reconciliation process, which does not publicly announce the measurement basis, is necessary. Note that unlike in other protocols that omit a public basis announcement [10], here the encoding and receiving bases have been chosen randomly for every transmitted qubit.

Now consider the following situation: The two legitimate communicating parties, Alice and Bob, have just produced a raw key of length n . Thus, Alice possesses a list containing her random preparation basis and the random value of the qubit transmitted at each particular basis choice. Likewise Bob possesses a list containing his random measurement basis and the corresponding random measurement result for each qubit received. Every entry in these lists represent a single transmitted qubit and can be expressed in two bits of classical information, one for the basis that has been used (B_i), the other (K_i) for the prepared bit value or the outcome of the measurement. Every entry of the list can thus be written as

$$(B_{p,i}, K_{p,i}) \quad p = \text{Alice, Bob} \quad i = 0, 1, \dots, n \quad (1)$$

with $B_{p,i}$ and $K_{p,i}$ being single bit values. Additionally Alice and Bob share a classical secret $S_{1\dots 2n}$. This $2n$ bit secret string has to be available to Alice and Bob before the protocol starts. For the further usage it is split into two parts of equal length $S_{\text{Alice}, 1\dots n}$ and $S_{\text{Bob}, 1\dots n}$.

The sifting process now works as follows (see Figure 1b). Alice and Bob each apply an XOR operation between their local list $B_{\text{Alice}, i}$ ($B_{\text{Bob}, i}$) and $S_{\text{Alice}, i}$ ($S_{\text{Bob}, i}$) to produce a message $M_{\text{Alice}, i}$ ($M_{\text{Bob}, i}$), in other words

$$M_{p,i} = B_{p,i} \text{ XOR } S_{p,i} \quad (2)$$

The two computed messages ($M_{p,i}$) are then exchanged over a classical channel. Upon reception, Alice and Bob can decode the message of their communication partner and regain the original list of bases by applying the inverse operation

$$B_{p,i} = M_{p,i} \text{ XOR } S_{p,i} \quad (3)$$

After this decoding step, Alice and Bob both have information on both lists of bases $B_{\text{Alice}, i}$ and $B_{\text{Bob}, i}$. Thus, they can now remove all entries of their record where

$$B_{\text{Alice}, i} \neq B_{\text{Bob}, i} \quad (4)$$

The eavesdropper, called Eve from now on, can not reproduce this step, because she does not have the shared secret $S_{p,i}$. This means that even if she has done some sort of eavesdropping on the quantum channel, her information on the sifted key is less than in the case of the

original BB84 protocol, as she can not correctly sift the key with certainty.

Once the sifting process is completed, Alice and Bob share a sifted key, which usually contains errors. In order to generate a secure key, which can in turn be used for secure transmission of data, this error has to be estimated and corrected [11]. After error estimation and error correction, a secure key is generated from the error-free sifted key. In BB84 this is done by using a classical privacy amplification protocol, which washes out the information a possible eavesdropper could have obtained on the key by measurements on the quantum channel. In this step the final key is reduced in length depending on the amount of information an eavesdropper could possess of the error corrected sifted key.

We will show that in our case the encryption of the classical channel during basis reconciliation reduces the amount of information an eavesdropper can get on the sifted key. Even though we do not have a complete quantitative description of this reduction of information accessible to Eve, we suspect that the additional privacy amplification step might not be required under certain conditions. One has to keep in mind, that the presharing of a secret string does not represent a disadvantage compared to BB84, where a shared key is required for authentication of the classical channel [12].

After the secret key has been established between Alice and Bob, the protocol starts anew with the transmission and measurement of qubits over the quantum channel. During the new run of the protocol, the shared secret ($S_{p,i}$) used to encrypt the basis exchange has to be reused. It is therefore necessary to quantify the amount of information an eavesdropper can gain about the shared secret during a single run of the protocol. In general the upper bound for this information gain depends on the quantum bit error rate (QBER) as we will discuss in the next section. To sustain the secrecy of the shared secret it is therefore necessary to subsequently refresh the secrecy of the initial shared secret after every run of the protocol.

SECURITY CONSIDERATIONS

The protocol presented in the last section reduces the possible knowledge an eavesdropper can obtain on the sifted key that is established between Alice and Eve. In this section we try to quantify this reduction of information accessible to the eavesdropper. In the limiting case of long key length we find a strong indication that our protocol has an advantage over the existing combination of BB84 and privacy amplification. Considering that we use a resource that has not been used to the full extent in existing protocols, namely the randomness of the basis choices, it is reasonable that such an advantage exists.

The security analysis is split in two parts. First we an-

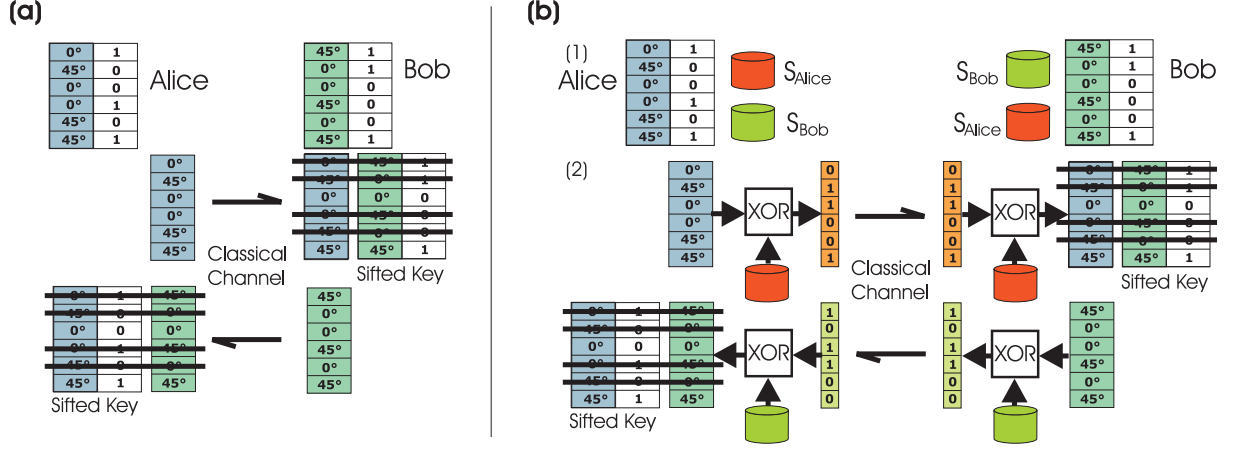


Figure 1: **(a)** Sketch of the original BB84 sifting method. The bases used to encode and measure the qubits are transmitted unencrypted over the classical channel. Using the list of bases received from their respective communication partners, they can decide which qubits were encoded and measured in compatible bases and therefore contribute to the sifted key. **(b)** Sketch of the protocol proposed in this paper. (1) Additionally to the lists of BB84, Alice and Bob both possess a preshared secret that is split into two parts, S_{Alice} , and S_{Bob} . (2) The information which basis was used during each individual measurement is encrypted before it is sent over the classical channel using the shared secret. This is done by applying a logic XOR between the list of bases and a part of the shared secret. This encryption of the encoding and measurement bases renders it impossible for a third party to correctly sift measurement results obtained from eavesdropping on the quantum channel. For the protocol to be secure it is mandatory that Alice and Bob use different parts of the shared secret and that for successive runs of the protocol, the secrecy of the shared secret has to be continuously refreshed.

analyze the amount of information about the shared secret that can be extracted from a single cycle of the protocol. If this amount of information is smaller than the final sifted key, then it is possible to grow a longer shared key with our protocol. In the second part, we analyze the case where Eve has no information on the shared secret and thus has to sift her measurement results without any knowledge on the basis used by Alice and Bob.

and thus,

$$P_i = C_i \text{ XOR } K_i^{\text{sifted}}. \quad (6)$$

To simplify the further treatment, we assume that Eve has full information on the raw key. This can be written as

$$B_{\text{Eve},i} = B_{\text{Alice},i} \quad \text{or} \quad B_{\text{Eve},i} = B_{\text{Bob},i} \quad (7)$$

and

$$B_{\text{Bob},i} = B_{\text{Alice},i} \implies K_{\text{Eve},i} = K_{\text{Alice},i} = K_{\text{Bob},i}. \quad (8)$$

Plaintext Attack

For the security of the proposed protocol, it is important that the shared secret can not be determined by analysis of the messages $M_{\text{Alice},i}$ and $M_{\text{Bob},i}$ and any resources that are accessible to an eavesdropper. This includes the ciphertext (C_i) that is finally sent by Alice to Bob after a secret key has been established and full knowledge of the plaintext (P_i) that has been transmitted with this key. These two resources enable Eve to gain full knowledge of the key that has been used to send the message. This can be seen by the fact that, using the Vernam cipher [13], the ciphertext is usually created from the plaintext by

$$C_i = P_i \text{ XOR } K_i^{\text{sifted}} \quad (5)$$

Note that this assumption provides Eve with more information than she could obtain with any eavesdropping scheme. For a detailed security analysis one would have to drop this assumption and introduce a quantum bit error rate dependent probability for Eve to have correct bit value for each position in the raw key. However in our proof of principle analysis it suffices to assume that Eve has complete knowledge of the raw key.

We now assume that the sifted key consists of exactly half the number of bits of the raw key, as this is the case with the highest probability. In this case there exist $\binom{n}{2}$ functions [15] that represent a possible sifting method

(see Figure 2):

$$f^k : (K_{p,1}, \dots, K_{p,n}) \longrightarrow (K_1^{\text{sifted}}, \dots, K_{\frac{n}{2}}^{\text{sifted}}) \\ k = 1, \dots, \binom{n}{\frac{n}{2}} \quad (9)$$

It is easy to see that knowledge on the sifting function f that was used to create the sifted key, is equivalent to knowledge of shared secret S_j that has been used during basis reconciliation.

Without any knowledge of the raw key, thus in the case where Eve does not extract any information from the quantum channel, Eve can gain no information about the used sifting function and therefore about the shared secret.

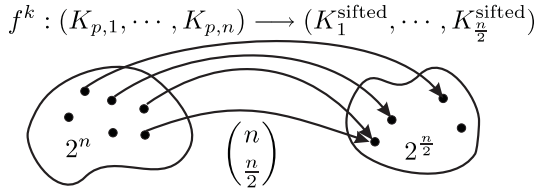


Figure 2: There exist $\binom{n}{\frac{n}{2}}$ sifting functions that map an n -bit raw key to a $\frac{n}{2}$ -bit sifted key.

However, if Eve has maximal information on the raw key as assumed in (7) and (8), she can try out all possible sifting functions with her own raw key, and exclude all functions f^k that do not reproduce the sifted key, she knows from her plaintext analysis. This reduces the number of possible sifting functions to

$$k_{\max} = \frac{\binom{n}{\frac{n}{2}}}{2^{\frac{n}{2}}} \sim e^{\alpha n} \quad 0 < \alpha < 1 \quad (10)$$

which is still exponentially growing with the key length n .

This reduction in the number of sifting functions can be written as a gain of information I on the shared secret, by calculating the difference in the Shannon entropy with and without ruling out the sifting functions that do not reproduce the final sifted key:

$$I = H^{\text{apriori}} - H^{\text{aposteriori}} \quad (11)$$

with

$$H = - \sum_i p_i \log_2 p_i \quad (12)$$

Assuming that all sifting functions are equally likely,

$$p_i = p \quad \forall p_i \quad (13)$$

this reduces to

$$H = -\log_2 p \quad (14)$$

and we get an information gain of

$$H = \log_2 \binom{n}{\frac{n}{2}} - \log_2 \frac{\binom{n}{\frac{n}{2}}}{2^{\frac{n}{2}}} = \frac{n}{2} \quad (15)$$

Because this information gain has been derived for the case where the eavesdropper has full information on the raw key, this represents the upper bound on the information an eavesdropper can gain on the shared secret. To sustain the secrecy of the shared secret, the legitimate parties have to use this amount of bits from the generated sifted key to refresh the shared secret. In our case this would leave the legitimate parties not a single bit for secret communication. However, this derivation is based on the unrealistic assumption that Eve possesses full information on the raw key. One can therefore conclude that the maximal amount of information on the shared secret in a realistic eavesdropping scheme is less than the value obtained here. This strongly suggests that it is possible to use the protocol proposed in this paper for secure quantum key growing.

Again, we would like to stress that the security analysis presented is based on assumption (7), which gives the eavesdropper much more information on the raw key than is possible for any eavesdropping strategy.

Sifting without Basis Information

In the last section we showed that even under the assumption that Eve has maximal knowledge on the raw key and the transmitted plaintext, the produced sifted key is sufficiently large to sustain the secrecy of the shared secret. We now want to show that the unavailability of the basis information can drastically reduce the probability to obtain the correct sifted key.

Let us now consider the case where Eve does a simple *intercept and resend* eavesdropping strategy [14] on all qubits transmitted from Alice to Bob. If she uses the same two basis sets as Alice and Bob, the probability for having a correct final key bit is 75%, given that she has full basis information which is needed to sift her measurement results key. In our protocol, this information is not available to Eve, and thus a qubit intercepted in a compatible basis does not necessarily lead to a correct bit in the sifted key. This reduction in the probability to obtain a correct final key bit reduces the information accessible to Eve (see Figure 3).

The probability that a single bit K_l^{sifted} of the sifted key is derived from a specific bit K_i in the raw key can be written by the binomial distribution

$$P(K_l^{\text{sifted}} \leftrightarrow K_{\text{Eve},i}) = \binom{i-1}{l-1} \left(\frac{1}{2}\right)^i \quad (16)$$

For a large number of l , this distribution can be approximated by a Gaussian distribution centered at $i = 2l$ and

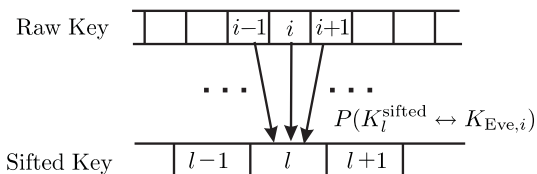


Figure 3: Without the complete basis information, the eavesdropper is presented with the following situation:

For every bit of the sifted key, there is a certain probability that it was derived from a specific bit of the raw key. With increasing key length n , more and more raw key bits contribute with non-vanishing probability to the specific sifted key bit. This reduces the probability to conduct a valid sifting process and therefore reduces the information on the sifted key accessible to the eavesdropper.

$$\sigma = \frac{\sqrt{i}}{2}.$$

The full width of half-maximum of this distribution can be seen as the number of basis pairs that contribute with a significant probability to the given sifted key value K_l^{sifted} . By increasing the length n of the raw key, the information that Eve can extract from her measurement results can be in principle reduced arbitrarily.

Authentication

Until now we did not specify the requirements of the classical channel used in the proposed protocol. One of the important features of the classical channel in BB84 is message authentication. There, the authentication of the classical channel is crucial for the security of the protocol. Without authentication, a selective modification of the basis reconciliation process would allow an eavesdropper to decrease the detectable QBER and thus to hide the quantum error he introduced during the measurements on the quantum channel.

In our protocol, this selective modification of the basis reconciliation process is not possible as the bases are encrypted with the shared secret and therefore completely random. The plaintext attack does not work to gain information on the shared secret, because the basis exchange takes place before the transmission of a ciphertext. However, any modification to a randomly encrypted message $M_{p,i}$ randomly changes the bases information $B_{p,i}$ and can therefore, in average, not lead to a decreased QBER. This is an indication, that our protocol could also work without authentication of the basis reconciliation process. However, until a proof is found for this argument we have to assume an authenticated classical channel.

CONCLUSION

We shown that the random basis choice in quantum cryptography is an important resource and can exploited more than has been done in existing protocols. Furthermore we have presented a novel protocol for quantum key growing that makes use more extensively of the inherent randomness of basis choices already present in the case of the classical BB84 protocol. By encrypting the information on the classical channel during the sifting process, it is possible to arbitrarily reduce the mutual information between a possible eavesdropper and the legitimate parties. This is due to the fact, that the eavesdropper can not reproduce the sifting process even in the case where he has maximal information on the raw key, and partial knowledge of the final secret key. A complete security proof and comparison with the full BB84 protocol including error correction and privacy amplification has still to be constructed. However we suspect that our method has significant advantages in cases where the QBER is high and secure bit rates suffer from a heavy decrease due to privacy amplification.

ACKNOWLEDGEMENTS

We would like to thank Norbert Lütkenhaus for helpful comments and Rupert Ursin and Rainer Kaltenbaek for their input in many discussion. This work was supported by the Austiran Science Foundation (FWF), Spezialforschungsbereich (SFB) 015 P20, ARC Seibersdorf Research GmbH (ARCS), by the European Commission, contract no. IST-2001-38864 RAMBOQ and the Alexander von Humboldt Foundation.

* Electronic address: hannes.boehm@exp.univie.ac.at

- [1] Nicolas Gisin, Grégoire Ribordy, Wolfgang Tittel, and Hugo Zbinden. Quantum cryptography. *Rev. of Mod. Phys.*, 74:145–195, March 2002.
- [2] Charles H. Bennett and Gilles Brassard. Quantum cryptography: public key distribution and coin tossing. In *Proceedings of the IEEE International Conference on Computers, Systems and Signal Processing*, pages 175–179, Bangalore, India, December 1984.
- [3] Christopher A. Fuchs, Nicolas Gisin, Robert B. Griffiths, Chi-Sheng Niu, and Asher Peres. Optimal eavesdropping in quantum cryptography. i. information bound and optimal strategy. *Phys. Rev. A*, 56:1163–1172, 1997.
- [4] Artur K. Ekert. Quantum cryptography based on Bell's theorem. *Phys. Rev. Lett.*, 67:661–663, 1991.
- [5] Charles Bennett, Gilles Brassard, and David Mermin. Quantum cryptography without Bells theorem. *Phys. Rev. Lett.*, 68:557–559, 1992.
- [6] Thomas Jennewein, Christoph Simon, Gregor Weihs, Harald Weinfurter, and Anton Zeilinger. Quantum cryp-

- tography with entangled photons. *Phys. Rev. Lett.*, 84(20):4729–4732, May 2000.
- [7] Suteku D. Naik, Charles G. Peterson, Andrew G. White, Andrew J. Berglund, and Paul G. Kwiat. Entangled state quantum cryptography: Eavesdropping on the ekert protocol. *Phys. Rev. Lett.*, 84:4733–4736, 2000.
 - [8] Wolfgang Tittel, Jürgen Brendel, Hugo Zbinden, and Nicolas Gisin. Quantum cryptography using entangled photons in energy-time bell states. *Phys. Rev. Lett.*, 84:4737–4740, 2000.
 - [9] Charles H. Bennett, Gilles Brassard, and J. M. Robert. Privacy amplification by public discussion. *SIAM J. Comput.*, 17:210–229, 1988.
 - [10] Won Young Hwang, In Gyu Koh, and Yeong Deok Han. Quantum cryptography without public announcement of bases. *Phys. Lett. A*, 244:489–494, 1998.
 - [11] Gilles Brassard and Louis Salvail. Secret key reconciliation by public discussion. *Lecture Notes in Computer Science*, 765:410–423, 1994.
 - [12] Norbert Lütkenhaus. Estimates for practical quantum cryptography. *Phys. Rev. A*, 59:3301–3319, 1999.
 - [13] Gilbert S. Vernam. Cipher printing telegraph systems for secret wire and radio. *J. Amer. Inst. Elect. Eng.*, 55:109–115, 1926.
 - [14] Bruno Huttner and Artur K. Ekert. Information gain in quantum eavesdropping. *J. Mod. Opt.*, 41:2455, 1994.
 - [15] If the length of the sifted key is kept secret by Alice and Bob, the assumption that the sifted key consists of exactly $\frac{n}{2}$ bits gives a lower estimate for the number of sifting functions.